

PROTECTION^{PRO}[®]

BY MADICO

PROPER INSTALLATION TECHNIQUE FOR DEVICE PROTECTION



INSTALLATION TOOLS



Installation Gel



Squeegee



Microfiber Cloth




Adhesive Tape


INSTALLATION

1. Clean the surface of the device with ProtectionPro Gel, wiping and polishing the device with a microfiber cloth supplied in the ProtectionPro kit.

Ensure cloth is clean and in good condition.

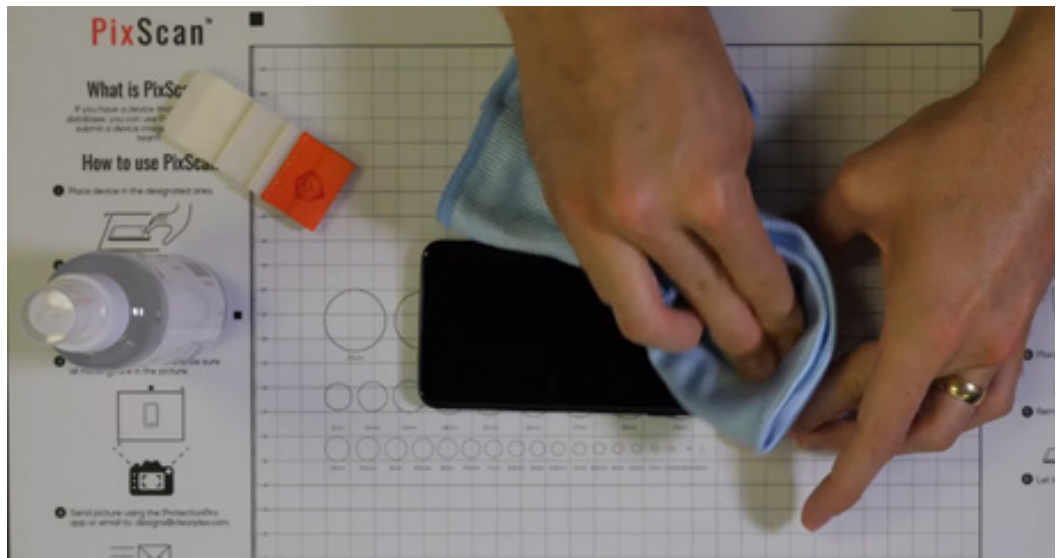


2. Use the same adhesive tape used to affix film to cutting mat and lift any dust and debris from the phone surface, ensuring not to leave fingerprints on the device screen. Be sure ProtectionPro gel is completely evaporated and the screen is free of streaks or residue.

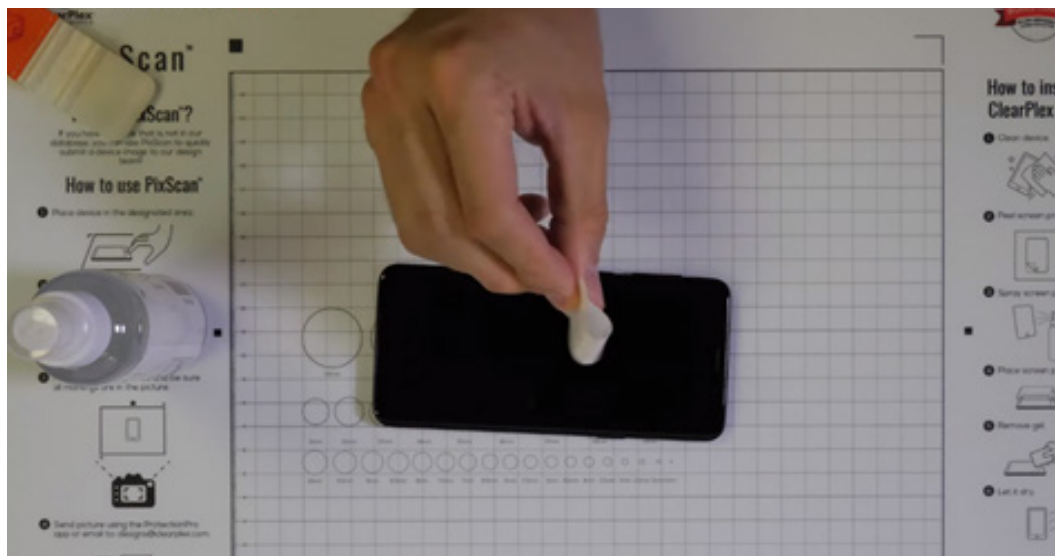


3. Remove all speaker, camera and sensor cut outs and peel the ProtectionPro film from the back of the release liner.

4. Wet your fingertips with ProtectionPro gel and spray a liberal amount of gel on the device as well as the sticky side of the film.

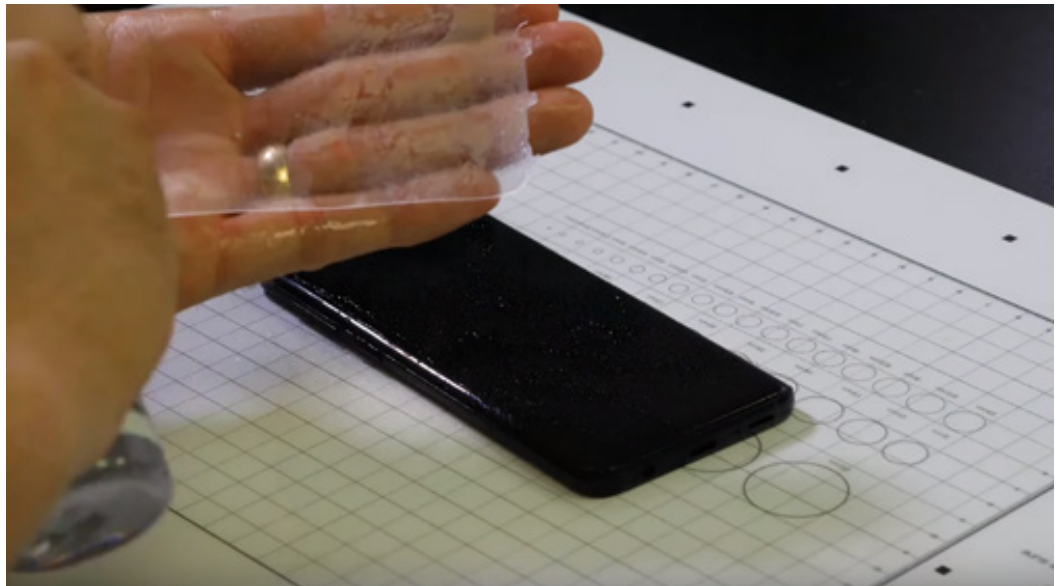


5. Place the film on the device, "floating" the film into place, until the film aligns properly.

6. Make an "anchor line" dragging the squeegee, lightly from the speaker to the "home button".

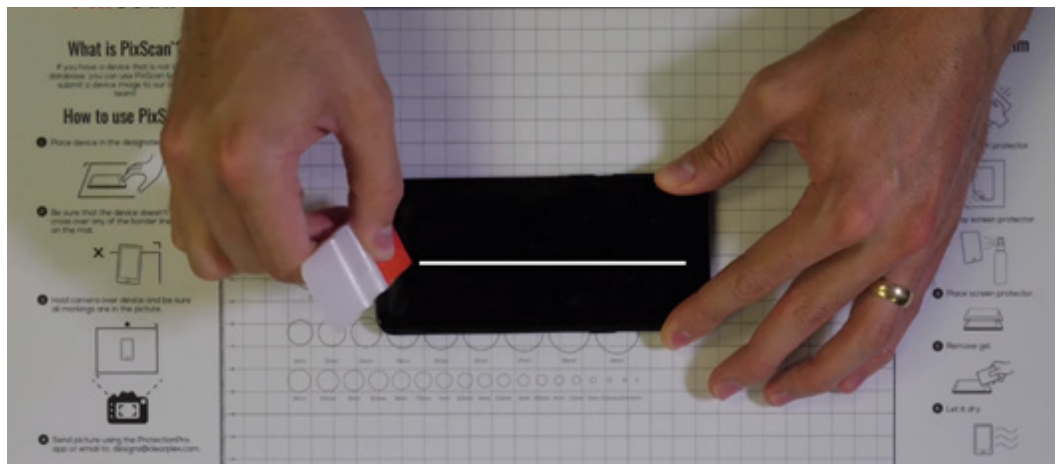

7. Using an increased amount of pressure, create and "anchor rectangle" in the center of the device.

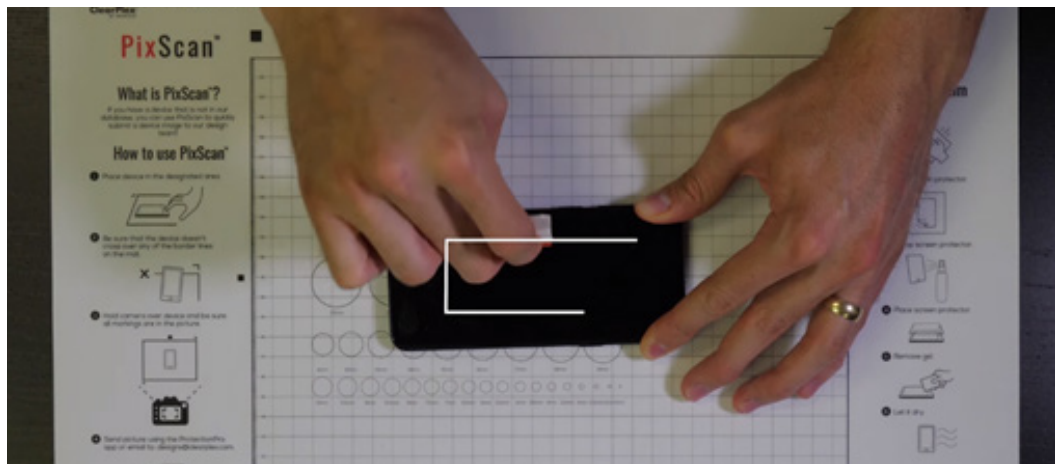

8. Continue the install working the gel out toward the edges, never dragging along the sides of the device. Always work toward edges, never along edges!

9. Increase pressure of squeegee on the device working the gel out more, using light pressure around speaker cutouts and curves.

10. Use a high amount of pressure to squeegee out all of the gel, checking for gel spots using the overhead lighting in the room.



11. Carefully inspect the surface of the film for residual pockets of installation gel. Use squeegee to push any remaining gel to the edge.

12. For curved screen devices, spend 5-10 min pressing edge of the film to ensure firm adhesion.



POST INSTALLATION

Be sure that the customer takes extra care to not place the phone in a case, bag or pocket for 60-90 minutes following installation to ensure proper and undisturbed edge and corner adhesion.

Forwarn the customer that there may be some "rainbowing" or clouding under the film even when all of the gel has been removed. These begin to disappear after 2 hours and completely after 24 hours as the residual moisture evaporates.

NOTES

Curved and/or Oleophobic Screens: Take extra care to thoroughly remove all moisture under film and add more curing time as needed to ensure proper adhesion.

Cleaning Cloth: Be sure cloth is only used to clean phone screens. Never to clean machines, furniture, windows etc. An accumulation of dirt, oil, grease or other debris can affect the quality of device cleaning and installation.